

SafeSIGN

Catalog Number	
Notes	Type

INTENDED USE

Ideal for applications, including those requiring attractive, quick installation exit signs and in areas where electrical wiring is difficult or not preferred. NO WIRING, NO ELECTRICITY, and NON-RADIOACTIVE,

CONSTRUCTION

Made of High-Quality Aluminum sheeting, The All-Aluminum design is impact-resistant, water-proof, corrosion-proof, and flame-retardant.

The High-Brightness Photoluminescent Material is applied directly onto the aluminum body. without the use of vinyl or plastic components it is non-radioactive, non-toxic, flame-retardant, with uniform legend illumination. Will not warp due to humidity variances.

INSTALLATION

Easy back-mounting via 4 screws and included pressure-sensitive adhesive

Install SafeSign photoluminescent EXIT signs only in locations, where an external illumination source is present, is deemed reliable and is supplied by a circuit not controlled by automatic timers or sensors, and whose controls are accessible only to authorized personnel. This reliable external illumination source is to be energized at all times during building occupancy.

LEGIBLE VIEWING DISTANCE : **75 feet**

CHARGING LIGHT SOURCE

5 foot-candles of fluorescent light must be present on the sign face at all times during building occupancy. After it is exposed under to this light for 60 minutes, it will be visible and legible in total darkness to observers standing 75 feet away from the sign 90 minutes after all light has been extinguished

PRODUCT CARE : Periodically clean the sign facing with a damp cloth, and conduct periodic inspections to ensure the sign is clear and visible.

SafeSIGN Photoluminescent pigment has a design life expectancy of 20 years+. Product longevity depends on maintaining the original integrity of the product.

LISTING

UL Listed (standard). meets and exceeds the observation visibility criteria required for UL-924 "Emergency Lighting and Power Equipment" meets NFPA Life Safety Code 101 requirements.

WARRANTY

5 years Manufacturer's Limited warranty against material defect and workmanship. SafeSIGN warrants to the buyers that its products are free from defects in material and workmanship, but limits its obligation under this warranty to repair or replacement of the product shown to SafeSIGN's satisfaction to have been defective at the time SafeSIGN sold it.

UL924 PHOTOLUMINESCENT EXIT SIGN

FL

Surface Mount Design



UC01A3120-FL-RD




UC02A3120-FL-RD



UC01A3120-FL-GN




UC02A3120-FL-GN

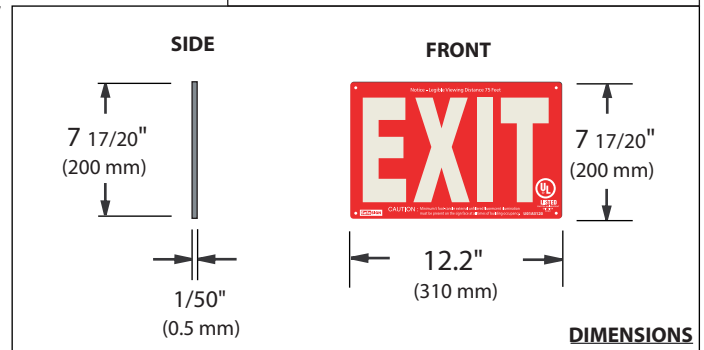

ORDERING INFORMATION

* Directional Indicators are ordered separately for FL model. Universal design allows them to be used for either LEFT, RIGHT, or BOTH DIRECTIONS.

1. EXIT SIGN

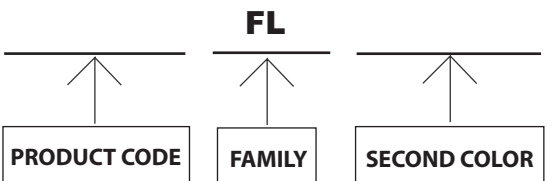

UC01A3120
- EXIT Luminous
UC02A3120
- Face Luminous


FL - FLUSH

RD - RED
GN - GREEN

* First Color = Luminous

EXAMPLE : **UC01A3120 FL RD**
UC02A3120 FL RD

2. DIRECTIONAL INDICATOR

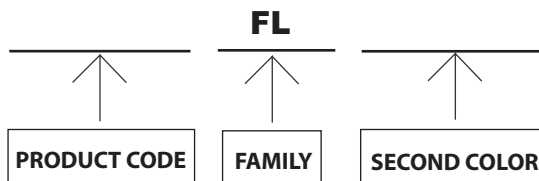

C01AR-
- for **UC01A3120**
C02AR
- for **UC02A3120**

FL - FLUSH

RD - RED
GN - GREEN

* First Color = Luminous

EXAMPLE : **C01AR FL RD**
C02AR FL RD

DIRECTIONAL INDICATOR

Install directly adjacent to the Exit Sign, same arrow can be used for both directions. Attached by screws.

