

# SafeSIGN

Catalog Number	
Notes	Type

## INTENDED USE

Ideal for applications, including those requiring attractive, quick installation exit signs and in areas where electrical wiring is difficult or not preferred. NO WIRING, NO ELECTRICITY, and NON-RADIOACTIVE,

## CONSTRUCTION

Made of High-Quality Aluminum sheeting, The All-Aluminum design is impact-resistant, water-proof, corrosion-proof, and flame-retardant. The High-Brightness Photoluminescent Material is applied directly onto the aluminum body. without the use of vinly or plastic components it is non-radioactive, non-toxic, flame-retardant, with uniform legend illumination. Will not warp due to humidity variances.

## INSTALLATION

Easy back-mounting via 4 screws.

Install SafeSign photoluminescent EXIT signs only in locations, where an external illumination source is present, is deemed reliable and is supplied by a circuit not controlled by automatic timers or sensors, and whose controls are accessible only to authorized personnel. This reliable external illumination source is to be energized at all times during building occupancy.

LEGIBLE VIEWING DISTANCE : **50 feet**

## CHARGING LIGHT SOURCE

5 foot-candles of flourescent light must be present on the sign face at all times during building occupancy. After it is exposed under to this light for 60 minutes, it will be visible and legible in total darkness to observers standing 75 feet away from the sign 90 minutes after all light has been extinguished

PRODUCT CARE : Periodically clean the sign facing with a damp cloth, and conduct periodic inspections to ensure the sign is clear and visible.

SafeSIGN Photoluminescent pigment has a design life expectancy of 20 years+. Product longevity depends on maintaining the original integrity of the product.

## LISTING

UL Listed (standard). meets and exceeds the observation visibility criteria required for UL-924 "Emergency Lighting and Power Equipment" meets NFPA Life Safety Code 101 requirements.

## WARRANTY

5 years Manufacturer's Limited warranty against material defect and workmanship. SafeSIGN warrants to the buyers that its products are free from defects in material and workmanship, but limits its obligation under this warranty to repair or replacement of the product shown to SafeSIGN's satisfaction to have been defective at the time SafeSIGN sold it.

## UL924 PHOTOLUMINESCENT EXIT SIGN

# FL2

## Surface Mount Design

## UC04 SERIES

RED or GREEN Face Finish with Luminous EXIT letters

Includes two adjustable Directional Indicators



**LISTED**


PHOTOLUMINESCENT  
EXIT SIGN  
FWBX  
(UL 924)



RED




GREEN

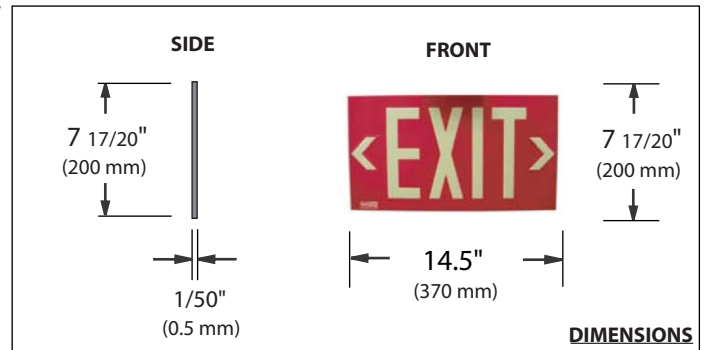

## ORDERING INFORMATION

EXAMPLE : UC04-FL2-RD  
UC04-FL2-GN

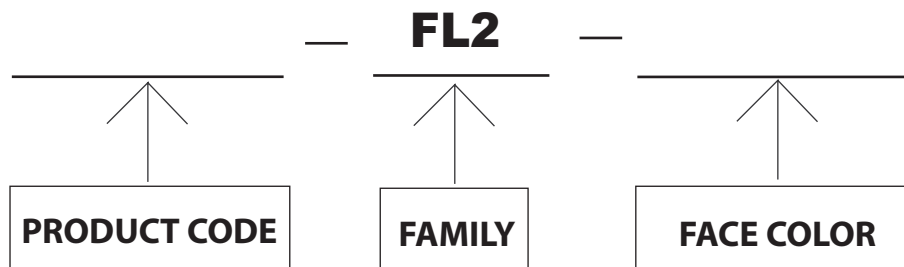

**UC04**  
- EXIT Luminous

**FL2** -Flat  
Panel  
Model

**RD** - RED  
**GN** - GREEN

\* First Color = Luminous